

11-13-00

A

# UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing  
(Only for new nonprovisional applications under 37 CFR §1.53(b))

ADDRESS TO:

Commissioner of Patents and Trademarks  
Box Patent Application  
Washington, D.C. 20231

Attorney Docket No. 206248

First Named Inventor PANDYA, Ken V.

Express Mail No. EL305740452US

JC929 U.S. PTO  
09/710460

11/10/00

## APPLICATION ELEMENTS

1. ☒ Utility Transmittal Form
2. ☒ Specification (including claims and abstract) [Total Pages 26]
3. ☒ Drawings [Total Sheets 9]
4. ☒ Combined Declaration and Power of Attorney [Total Pages 3]
  - a. ☒ Newly executed
  - b. ☐ Copy from prior application  
[Note Box 5 below]
    - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☐ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy
  - c. ☐ Statement verifying above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet and document(s))
9. ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)  
☐ Form PTO-1449  
☐ Copies of References
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☒ Small Entity Statement(s)  
☒ Enclosed  
☐ Statement filed in prior application; status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
16. ☐ Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information in (a) and (b) below:

- (a) ☐ Continuation ☐ Divisional ☐ Continuation-in-part of prior application Serial No. \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_; Group Art Unit: \_\_\_\_\_
- (b) Preliminary Amendment: Relate Back - 35 USC §120. The Commissioner is requested to amend the specification by inserting the following sentence before the first line:  
"This is a ☐ continuation ☐ divisional of copending application(s)  
☐ Application No. \_\_\_\_\_, filed on \_\_\_\_\_, and which designates the U.S."

## APPLICATION FEES

APPLICATION FEES				
BASIC FEE				\$710.00
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	23 -20=	3	x \$18.00	\$ 54.00
Independent Claims	4 -3=	1	x \$80.00	\$80.00
<input type="checkbox"/> Multiple Dependent Claim if applicable			+\$270.00	\$
Total of above calculations =				\$844.00
Reduction by 50% for filing by small entity =				\$(422.00)
<input type="checkbox"/> Assignment fee if applicable			+\$40.00	\$
TOTAL =				\$422.00


## UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 206248

19. ☐ Please charge my Deposit Account No. 12-1216 in the amount of \$ .
20. ☒ A check in the amount of \$422.00 is enclosed.
21. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 12-1216:
- a. ☒ Fees required under 37 CFR §1.16.
- b. ☒ Fees required under 37 CFR §1.17.
22. ☒ The Commissioner is hereby generally authorized under 37 CFR §1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR §1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 12-1216 for any fee that may be due in connection with such a request for an extension of time.

## 23. CORRESPONDENCE ADDRESS

Thomas A. Belush, Registration No. 37,090  
Leydig, Voit & Mayer, Ltd.  
Two Prudential Plaza, Suite 4900  
180 North Stetson  
Chicago, Illinois 60601-6780  
Telephone: (312) 616-5600  
Facsimile: (312) 616-5700

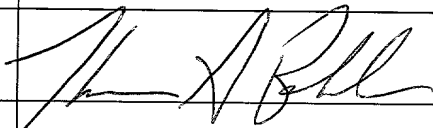Name	Thomas A. Belush
Signature	
Date	November 10, 2000

## Certificate of Mailing Under 37 CFR §1.10

I hereby certify that this Utility Patent Application Transmittal and all accompanying documents are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" Service under 37 CFR §1.10 on the date indicated below and is addressed to: Commissioner of Patents and Trademarks, Box Patent Application, Washington, D.C. 20231.

LINDA A. CAMERON		November 10, 2000
Name of Person Signing	Signature	Date

**PATENT**

Attorney Docket No. 206248

Applicant or Patentee: Ken V. Pandya

Appln. or Patent No.:

Filed or Issued:

For: FILTER SCREEN NOZZLE AND SYSTEM FOR FLUID PROCESSING

**VERIFIED STATEMENT (DECLARATION)  
CLAIMING SMALL ENTITY STATUS  
37 C.F.R. §§ 1.9(f) & 1.27(c) - SMALL BUSINESS CONCERN**

I hereby declare that I am:

☒  
☐

the owner of the small business concern identified below:

an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Concern: AWTS, Inc.

Address of Concern: 1817 Triple Crown Lane  
Plano, Texas 75093

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 37 C.F.R. § 121.3-18, and reproduced in 37 C.F.R. § 1.9(d), for purposes of paying reduced fees under Sections 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement: (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either directly or indirectly one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled: Filter Screen Nozzle and System for Fluid Processing, by inventor(s) Ken V. Pandya, as described in:

☒  
☐  
☐

The specification filed herewith.

Application No. , filed .

Patent No. , issued .

**Others Having Rights In The Invention**

If the rights held by the above-identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention is listed below and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 C.F.R. § 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 C.F.R. § 1.9(d), or a nonprofit organization under 37 C.F.R. § 1.9(e). (NOTE: Separate verified statements are

Name:  
Address:

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 C.F.R. § 1.28(b)).

Name of Person Signing: Ken V. Pandya  
Title in Organization: President  
Address of Person Signing: 1817 Triple Crown Lane  
Plano, Texas 75093

Signature

Date \_\_\_\_\_

00011-09004200

## **SPECIFICATION**

### **TO ALL WHOM IT MAY CONCERN:**

Be it known that Ken V. Pandya, a citizen of the United States., and resident at 1817 Triple Crown Lane, Plano, Texas 75093, U.S.A., has invented a certain new and useful FILTER SCREEN NOZZLE AND SYSTEM FOR FLUID PROCESSING of which the following is a specification.

## **FILTER SCREEN NOZZLE AND SYSTEM FOR FLUID PROCESSING**

### Field of the Invention

The present invention generally relates to fluid purification and particularly  
5 relates to a nozzle for use in a fluid treatment vessel.

### Background of the Invention

Fluids are commonly processed for purification or chemical treatment.  
More particularly, water and various chemicals, in liquid or gaseous form, are  
10 purified or otherwise treated for consumption, manufacturing or industrial  
processes. For example, water from an available source, such as a river, lake,  
ocean or deep well, usually contains undesired impurities, including suspended  
solids, and organic and inorganic impurities. The impurities must be removed to  
meet certain purity requirements, depending upon the intended use for the water.  
15 Public water systems are governmentally regulated so that impurities do not  
exceed levels considered safe for consumption. Certain industrial applications  
require even fewer impurities than the typical levels for drinking water.  
Semiconductor processing, pharmaceutical manufacturing, and steam boilers are  
some examples of applications requiring water with extremely low levels of  
20 impurities.

Fluid treatment systems are known for purifying water and otherwise  
processing fluids, including various liquid-from-liquid, liquid-from-solid, and  
liquid-from-gas separation processes. Fluid treatment systems often include more  
25 than one reactor vessel. For example, at least two reactor vessels are used in a  
typical water demineralizer purification system for a community, populated  
facility, or industrial facility that uses large amounts of purified water for  
industrial processes such as boiler feed or washing off electronics parts. Other

reactor vessel treatment systems are known for processing steam, acid, caustic, and a variety of other gases or liquids.

Conventionally, a reactor vessel includes a large tank which contains a granular processing medium, such as sand, anthracite, carbon, cation exchange resins, anion exchange resins, and mixed-bed resins. The processing medium occupies a lower portion of the vessel's interior chamber. A typical water demineralizer purification system includes at least two reactor vessels--a first containing a cation exchange resin medium and a second containing an anion exchange resin medium.

To treat the fluid, the fluid is brought into contact with the processing medium, such as ion exchange resin. The vessel includes an upper manifold for introducing a flow of the fluid into an upper portion of the vessel, from where it falls onto the processing medium. As the fluid flows downwardly through the processing medium, the fluid reacts with the processing medium during the physical contact. The treated fluid is then removed through a lower manifold that is immersed in the processing medium at a bottom portion of the vessel.

The lower manifold, which feeds to a common duct, includes an array of conventional nozzles which are generally spaced across the bottom portion of the vessel. To separate the fluid from the medium, each of the conventional nozzles has an exterior screen with narrow openings sized to prevent the passage of the processing medium. For example, in a system having an ion exchange resin as a process medium, which is typically comprised of resin beads, each having a diameter of generally about 2 mm (15-40 mesh), the nozzle screen openings are designed to be very narrow--only a few thousands of an inch wide.

In most prior art nozzles, the flow rate is governed by the collective open area of the screen. For reasons explained in greater detail below, it is desirable that each nozzle has a predetermined flow rate. Specifically, the flow rates are desirably consistent among the nozzles withdrawing fluid in order to promote an optimal flow profile. Therefore, in conventional nozzles, the screen must be manufactured with a high degree of precision to provide a predetermined total open area, in turn providing a desired flow rate.

Unfortunately, prior art fluid treatment systems have been known to lose treatment effectiveness, worsening over time. Some inefficiencies have been attributed to differences in flow rates that develop among a nozzles on a particular manifold. For example, a common problem is known as “channeling,” wherein the fluid favors a particular flow path or “channel” through the medium. Particularly, a majority of the fluid flows along a path of least resistance toward a nozzle having the greatest available open area. Of course, the processing medium in the “channel” soon becomes exhausted, because it is subjected to a disproportionate rate of fluid contact. At the same time, the medium in other areas of the vessel is not effectively utilized. Thus, channeling causes a reactor vessel to rapidly deplete its overall effectiveness, including loss of productivity, increased chemical usage, and increased waste.

In most conventional nozzles, the flow rate and fluid flow restriction is a function of the open area of the collective holes in the nozzle screen. Accordingly, a manifold is assembled using a plurality of like nozzles having equivalent screen open areas. Such nozzles have relatively equal flow rates, at least initially upon installation. Unfortunately, over time, some screen openings are known to become plugged with foreign matter or broken medium beads, reducing the open area and reducing the flow rate in the plugged nozzles. At the same time, the flow increase through unplugged screen openings has a wearing effect. The flow wear enlarges



the unplugged openings, thereby increasing the flow through those unplugged openings.

Notably, an increasing flow rate through an opening results in wear rate on the adjacent screen material, further increasing the screen openings of the favored nozzles. Moreover, the wire used to form such screens typically has a triangular cross section, for reasons explained below. When new, this triangular wire has edges formed by acute surfaces, but as these edges wear, the opening adjacent the screen rapidly expands at a non-linear rate due to the wire geometry.

Over time, the combination of screen plugging and screen wear result in a significant disparity in the open areas, and flow rates, among the conventional nozzles of a particular system. The drainage flow through the lower manifold therefore favors nozzles having the greatest screen opening areas, thus leading to the undesired channeling effect and associated operating inefficiencies. These inefficiencies result in lost productivity, an increase in required manpower due to increased regeneration requirements, and poor product quality.

In one known system, a restrictor plate was positioned across the duct mounted to the screen to provide communication between the manifold and the cavity defined by the screen. In this nozzle, however, the orifice was not positioned to optimally control a direction of flow through the screen for maximal efficiency.

Most treatment systems require a periodic regeneration or reconditioning of the processing medium. For example, in a vessel wherein the processing medium is ion exchange resin beads, charged sites on each bead become bonded with molecules of the impurities of the treated fluid, until the sites are used. In order for the medium to be effective, the beads must be periodically reconditioned with a

chemical bath that takes away the molecules from the charge sites on the ion exchange medium. For introducing such reconditioning chemicals, a reactor vessel is typically equipped with an internal distributor in an upper or middle portion of the vessel to introduce a flow of the chemicals above the processing medium. The chemicals flow down through the medium and are extracted through the nozzles of the lower manifold near the bottom of the tank.

Another conventional nozzle is known as a pipe-based filter screen nozzle. Such a pipe-based nozzle is basically an elongated filter screen nozzle of the type described above. In a treatment vessel employing pipe-based nozzles, a plurality of the pipe-based nozzles are mounted to a central hub near the bottom of the medium, the nozzles projecting radially outwardly from the hub.

A problem with many prior art systems employing long pipe based filter screen nozzles is that these systems have not optimally utilized the medium near bottom of the tank. Most tanks have curved, concave bottoms and tops to structurally withstand high operating pressures. In some of the prior art systems, the pipe based screen nozzles have been mounted to the manifold so as to be positioned in a common horizontal plane. This planar arrangement is wasteful, as it fails to fully utilize large space in the head of the vessel at the concave bottom of the tank below the nozzles. To avoid wasting this unused medium, it is known to provide a false bottom in the tank. However, such a system fails to optimally utilize the tank volume.

Therefore, a need exists for an improved fluid treatment system having greater efficiency. More particularly, a need exists for a nozzle that provides improved flow rate and pressure drop control.

### Summary of the Invention

It is an object of the invention to provide a high efficiency screen nozzle that optimizes the efficiency of fluid treatment operations.

5

Another object of the present invention is to provide an improved filter screen nozzle.

10 An additional object of the invention is to provide a nozzle that provides a consistent, predetermined flow rate that is not directly dependent upon the outer screen open area, thereby eliminating concern of unplanned or uncontrollable variations of the screen open area.

15 Still another object of the invention is to provide a fluid treatment system having improved flow profiles through a processing medium.

20 A further object of the invention is an improved nozzle which may be retrofit as a replacement nozzle in existing systems with little modification to existing manifold plumbing, thereby providing a cost-effective improvement to existing fluid treatment systems.

25 The present invention achieves the aforementioned objects and overcomes the deficiencies associated with the prior art fluid processing systems. For example, in an embodiment, a nozzle according to the invention has an outer screen with a total screen opening area and an inner restrictor having at least one orifice accounting for a total orifice area that is less than the screen opening area. The nozzle includes a duct which is mounted to a manifold within a reactor vessel. Flow to or from the duct must pass through the at least one restrictor orifice. The nozzle has a predetermined flow rate and pressure drop dictated by the inner

orifice area. The nozzle maintains a consistent flow rate over long periods of use, because the orifice open area is not as susceptible to plugging or wear as the outer screen.

5           The present invention provides a nozzle which results in improved and consistent flow profiles of a fluid passing through a process medium. More particularly, a manifold having a plurality of the nozzles promotes a uniform flow of process fluids inside the reactor vessel to optimize intimate mixing and/or contact of process fluids (e.g. acid or caustic) with process media (e.g., ion  
10   exchange resin).

Advantageously, because the nozzle improves the performance and efficiency of the fluid treatment, cost savings are achieved by reducing the frequency of regeneration cycles, in turn reducing the amount of the regeneration  
15   chemicals used. Additionally, the nozzle also promotes an even distribution of the regeneration chemicals, thereby optimizing the effectiveness of the medium regeneration and system cleaning.

An advantage of the present invention is to provide a filter screen nozzle in  
20   which flow through the nozzle is not dependent upon the area of the screen openings.

Another advantage of the present invention is to provide a nozzle system that optimizes uniform flow patterns through a processing medium within a  
25   reaction vessel.

A further advantage of the present invention is to provide a nozzle system that optimizes contact between the fluid and the processing medium.

Yet another advantage of the present invention is to provide a nozzle that optimizes the performance, service cycle and overall life of a fluid processing system.

5 A still further advantage of the present invention is to provide a nozzle that may be retrofit onto an existing fluid treatment system or utilized in constructing a new system.

Additional features and advantages of the present invention are described  
10 in, and apparent from, the detailed description, figures and claims.

#### Brief Description of the Drawings

FIG. 1 is a sectional, schematic side view of a reactor vessel for processing fluid.  
15

FIG. 2 is a sectional, schematic view as taken generally along line II-II of FIG. 1, showing, in plan view, a lower manifold.

FIG. 3 is a perspective view of a nozzle constructed in accordance with  
20 teachings of the present invention.

FIG. 4 is a sectional, view as taken generally along line IV-IV of FIG. 3.

FIG. 5 is a sectional view as taken generally along line V-V of FIG. 3.  
25

FIG. 6 is a fragmentary, sectional, schematic view through the reactor vessel, illustrating a nozzle of a lower manifold immersed in processing medium beads.

5

10

15

20

FIG. 12 is a sectional side view of a conventional nozzle.

Fig. 13 is a sectional, schematic, side view of a fluid treatment system having conventional pipe-based filter screen nozzles.

### Detailed Description of the Preferred Embodiments

Now referring to the figures, wherein like numerals designate like  
 5 components, in FIG. 1 there is shown an exemplary fluid treatment system 20.  
 The treatment system 20 is useful for treating fluids, for example for purifying  
 water. Generally, the treatment system 20 includes a vessel 22 defining an interior  
 chamber 24 that is partially occupied by a processing medium 26. The processing  
 medium 26 occupies the lower portion of the vessel 22. The vessel 22 includes an  
 10 upper manifold 28 having a plurality of nozzles 30 for introducing a process fluid,  
 such as water, into the vessel 22 above the processing medium 26. An upper main  
 line 32 delivers a flow of the process fluid to the upper manifold 28.

To withdraw fluid from the medium, the treatment system 20 includes a  
 15 lower manifold 34, as shown in FIG. 1. Referring to FIG. 2, the lower manifold  
 34 includes a plurality of pipe branches 36 in common communication with a  
 lower main line 37. Referring back to FIG. 1, the lower manifold 34 includes a  
 plurality of vertical pipe extensions 38 which project downwardly from the pipe  
 branches 36, and a plurality of filter screen nozzles 40 are mounted to the  
 20 respective pipe extensions 38. The nozzles 40 are immersed in the medium 26,  
 preferably near a bottom of the vessel 22. As illustrated in FIGS. 3 and 4, each of  
 the nozzles 40 generally includes a duct 42 for communicating with the lower  
 manifold 34 and an outer screen 44 constructed of wire or mesh, defining screen  
 openings 46. The nozzle 40 includes an internal cavity 48 defined by the screen  
 25 44.

Briefly referring to the prior art, a conventional nozzle 140, as illustrated in  
 FIG. 12, included a duct 142 and an outer screen 144 constructed wire or mesh.  
 The outer screen 144 defined a plurality of screen openings 146 sized very  
 30 narrowly to prevent passage of a processing medium. Accordingly, as described

above in the background section, the flow rate of the conventional nozzle 140 was controlled by the total area of the collective screen openings 146, as the screen openings 146 were smaller than the area of the duct 142. Various factors contribute to significant changes to the screen opening area over time, including wearing of the triangular screen wires and plugging of the narrow openings 146. Accordingly, the conventional nozzle 140 would yield a flow rate that is known to undesirably vary during service.

According to another conventional embodiment, FIG. 10 illustrates a known nozzle 340 having a disc-shaped restrictor plate 350. The nozzle includes a screen 344, a duct 342, an upper plate 362 and a bottom plate 360 defining an interior cavity 348. The restrictor plate 350 is mounted in the duct 342 and includes an orifice 354. The orifice 354 is operable to restrict flow through the duct, but is not capable of directing or concentrating flow through any particular portion of the screen 344.

Another type of conventional nozzle is shown in FIG. 13, which illustrates a fluid treatment system 520 having known pipe-based filter screen nozzles 540. Each of the pipe-based filter screen nozzles 540 is similar to the conventional filter screen nozzle 140 described in connection with FIG. 12, except the nozzle 540 is elongated. A lower manifold 534 includes a central hub 535 to which a plurality of the nozzles 540 are mounted. Each of the nozzles 540 extends radially outwardly toward a vertical side of the vessel 22. Unfortunately, due to the typically rounded, concave shape of the bottom of the vessel 22, the long straight nozzles 540 must be positioned vertically above a significant volume 570 of the medium 26. Therefore, the medium 26 in the bottom volume 570 is not effectively utilized, and the efficiency of the system 520 is not optimally realized.



According to an aspect of the invention, each of the nozzles further includes an internal flow restrictor which limits the flow rate of the nozzle and which provides directional and positional control of flow within the interior of the screen. The restrictor includes at least one orifice to provide communication  
5 between the duct and the inner cavity, and this orifice is positioned generally within the interior cavity defined by the screen. So that the predetermined flow rate of the nozzle is controlled by the restrictor, and not the screen, the total orifice area is less than the total screen opening area. Because the flow rate of the nozzle is not a function of the screen opening area, variations in flow rate are greatly  
10 reduced. Furthermore, the orifice may be positioned to concentrate flow through desired portions of the screen to optimize performance of the associated treatment system.

Specifically, referring to FIGS. 4 and 5, the nozzle 40 includes a restrictor  
15 50. The restrictor 50, in the illustrated embodiment, includes a tube comprising a cylindrical wall 52 that extends downwardly from the duct 42, generally centrally within the interior cavity 48 and concentrically to the screen 44. One or more orifice 54 disposed in the restrictor 50. More particularly, in the illustrated embodiment, a plurality of orifices 54 are disposed in the restrictor wall 52. The  
20 restrictor 50 is positioned generally centrally within the interior cavity 48. The total area of the screen openings 46 is greater than the total open area of orifices 54, thereby creating a significant pressure differential across the orifices 54, but not across the screen 44.

25 The nozzle 40 is capable of handling bi-directional flows. In particular, the nozzle 40 is operable to withdraw a flow from the exteriorly of the screen 44, into the interior cavity 48, through the orifices 54 and through the lower main line 37, or the nozzle 40 is operable to distribute fluid delivered from the duct 42, through the orifice 54 into the interior cavity 48 and outwardly from the screen 44.

To resist plugging by foreign particles, the screen 44 is preferably constructed from wire 56 having a triangular cross section, as shown in FIG. 4.

The wire 56 is wound around a plurality of spaced vertical posts 58. Enclosing the interior cavity 48, the nozzle 40 further includes a bottom plate 60 mounted to a lower end of the screen 44, and an upper plate 62 mounted to an upper end of the screen 44 and extending around the duct 42. It should be noted that in other embodiments, the screen 44 could be constructed of other types of wire, mesh, or plastic molded to have correctly sized screen openings, and the screen may be constructed in other shapes, e.g., cubical, spherical, etc. Additionally, either the upper plate 62 and/or lower plate 60 may also contain screen openings (not shown).

The screen 44 is operable to filter the fluid from the medium 26. Specifically, the width of each individual screen opening 46 is smaller than the smallest diameter of a particle of the medium 26, yet big enough to allow fines to pass through the system. For example, in an embodiment wherein the medium 26 is deionizer resin beads, the screen openings 46 are narrowly shaped with a width of only a few thousandths of an inch. Such beads are typically about 2 mm in diameter.

For directional control of flow, the orifices 54 are placed at respective positions and orientations for distributing flow for optimal effectiveness. In the embodiment illustrated in FIG. 4, for example, each of the orifices 54 is positioned near a bottom of the nozzle 40, having an orientation at an angle  $\Phi$  toward a bottom of the screen, non-perpendicular to an axis of the cylindrical wall 52. Additionally, as illustrated in FIG. 5, the orifices 54 are positioned at a variety of radial positions.

It has been found that circular orifices 54 are easily made by drilling, although it should be understood that an orifice 54 may be provided in any desired shape, such as a rectangular slot, etc. In an embodiment wherein the restrictor 50 is made of plastic, an orifice 54 may be easily molded in any shape. Furthermore, the restrictor 50 may be orifices may be at any position on the restrictor wall 52 as needed to provide a particular flow profile. Also, the restrictor 50 may be provided in various shapes and configurations effective to limit the flow rate internally of the screen 44.

For example, in the nozzle 40 of FIG. 6, in order to optimize the fluid contact with the medium 26, the orifices 54 are positioned near a bottom of the restrictor 50 to enhance flow at a bottom of the nozzle 40. This promotes fluid flow through portions of the medium near a bottom wall of the vessel 22, as indicated in FIG. 6, thereby maximizing the flow path of the fluid through the medium 26.

To further optimize fluid contact with a maximum volume of the medium 26, as illustrated in FIG. 1, the vertical pipe extensions 38 have various lengths as necessary to position the respective nozzles 40 near the bottom of the vessel 22.

This enables the nozzles 40 to induce flow through the entire volume of the medium 40. In an embodiment wherein the nozzles 40, vertical pipe extensions 38 and lower manifold 34 are mounted together with threaded fittings, the nozzles 40 are spaced slightly above the bottom of the vessel 22 to permit room for assembly. By positioning each of the nozzles 40 near the bottom of the vessel 22, the system greatly reduces unused volume of the medium 26, as has been problematic in some conventional systems as described in connection with FIG. 13. It should be understood, however, that nozzles 40 according to the invention may be provided at various orientations, such as horizontal or angled orientations, as needed in different treatment systems.

Metal or plastic may be used for making the nozzle 40, screen and manifold. Of course, the materials must be selected for compatibility with the particular process and regeneration fluids to be used. Preferred materials include stainless steel alloys, including Alloy 20 and 316 stainless steel. Metallic strainer construction provides strength, which may be important in day-to-day situations. For example, in an embodiment wherein a person might step on the lower manifold during a maintenance operation, a sturdy metallic construction is desired. Where strength is not a concern, the lower manifold 34 and nozzles 40 may be constructed of suitable thermoplastic materials.

So that the nozzle 40 provides a consistent predetermined flow rate over long time periods, the restrictor 50 is constructed so that the orifice is subject to less wear and plugging than the screen openings 46. Because the orifices 54 are located internally of the screen 44, the orifices 54 do not need to perform a physical filtering function, and thus, each of the orifices 54 may have a wider shape than the narrow screen openings 46. Further enhancing the wearability, the orifice 54 has a bore with a uniform diameter, in contrast to the diverging shape of the screen openings 46 due to the triangular wire 56. Additionally, the restrictor 50 is preferably made relatively thick material. Due to these features, the orifice 54 will resist wearing to an increased area, thereby providing a consistent flow rate and pressure drop across the orifice for a long time.

To process fluids, the treatment system 20 normally operates in a service mode as illustrated in FIG. 7a. In this mode, the process fluid is delivered from the upper main line 32 to the upper manifold 28, the fluid exiting from the upper nozzles 30 mounted on the upper manifold 28 and entering the interior chamber 24. The upper nozzles 30 are configured to uniformly distribute or sprinkle the

process fluid over a top of the medium 26. The process fluid flows uniformly downward through the medium 26, thereby treating and/or purifying the fluid. The nozzles 40 then withdraw the fluid into the lower manifold 34, the fluid flowing through the lower main line 37.

5

For some applications, the treatment system 20 operates in a reverse mode, as illustrated in FIG. 7b. In the reverse mode, the process fluid is introduced through the lower manifold 37, saturating the medium 26 and filling the tank 22, being withdrawn by the upper manifold 28. In these cases, the upper manifold 28  
10 may be equipped with nozzles 40 to maintain proper flow distribution.

The reverse mode of FIG. 7b may also be periodically implemented in a system otherwise operating with a service mode as described in connection with FIG. 7a. The periodic flow reversal through the nozzles 40 helps to clear out  
15 particles that may have become jammed in the screen openings 46 (FIG. 4).

In order to regenerate or recondition the medium 26, the treatment system 20 is periodically operated in a regeneration mode, as illustrated in FIG. 7c. The regeneration mode is necessary because the medium 26 becomes exhausted over  
20 time and must be exposed to chemicals which renew the effectiveness of the medium. The particular chemicals depend upon the type of medium, as is generally known. The system 20 includes an internal distributor 64 mounted in an upper or middle portion of the vessel 22. The distributor 64 introduces a flow of the chemicals above the processing medium 26. The chemicals flow down  
25 through the medium, thereby reconditioning the medium. The spent chemicals are extracted through the nozzles 30 of the lower manifold 34 near the bottom of the tank vessel 22.

Keeping the cost of improvement low, the nozzle 40 may be retrofit to existing treatment vessels, replacing the existing conventional filter nozzles. At the same time, any false bottoms are preferably removed, and vertical pipe extensions are also replaced as necessary to position the nozzles to the bottom of the vessel, whether the bottom curved, conical, etc. It has been found that the nozzle 40, when retrofit to an otherwise conventional filtration or ion exchange system, results in an increase in treatment efficiency of about 10-35%.

The nozzle 40 can work efficiently over a range of pressure and flow conditions. It has been found that suitable performance is achieved when a flow velocity across the flow orifice is maintained between about 2 to 10 feet per second, and when the pressure drop across the interior cavity is between about 0.25 to 3 psig.

According to another application of the nozzle 40, one or more of the nozzles 40 may be used to de-water a medium. For example, referring to FIG. 6, if the medium 26 is a slurry, such as mud, the nozzle 40 may be used to withdraw moisture from the medium by applying a vacuum to the lower manifold 34. The openings 46 in the screen 44 permit the passage of liquid, but at the same time preventing the passage of larger particles. Due to the orifices 54, the flow rates among a plurality of the nozzles 40 will remain the same in such a de-watering process. In order to clean out the nozzles 40 and prevent clogging, liquid is occasionally forced outwardly from the duct 42 through the orifices 54 and the screen openings 46 as needed to maintain flow.

25

To help isolate the regeneration chemicals and their effects, a nozzle 240 is illustrated in FIG. 8 according to another embodiment. The nozzle 240 generally includes a duct 242A, an outer screen 244 having screen openings 246, an interior cavity 248 defined by the screen 244, bottom and upper end plates 260, 262

enclosing the interior cavity 248. The nozzle 240 has a dedicated restrictor 250A with at least one orifice 254A for handling flow of the process fluid. However, for handling flow of the chemical fluid during regeneration, the nozzle 240 further includes a dedicated auxiliary restrictor 250B. The auxiliary restrictor 250B includes at least one auxiliary orifice 254B having a total orifice area less than the total area of the screen openings 246. Accordingly, the flow rate of regeneration chemicals is controlled by the auxiliary restrictor 250B, not the screen 244, creating a pressure differential the auxiliary orifice 254B during the chemical flow of the regeneration cycle.

A system 220 equipped with the nozzle 240 is illustrated in FIG. 9, shown in a regeneration mode. The system 220 includes an auxiliary manifold 34B to handle chemical flows, in addition to the lower manifold 34A to withdraw the process flow. The auxiliary manifold 34B includes a plurality of auxiliary pipe extensions 38B that are mounted in communication with the auxiliary restrictor 34B (FIG. 8). Because only the auxiliary restrictor 250B and auxiliary manifold 34B are subjected to the chemical flows, effects of the chemicals are isolated to these components. This reduces wearing effects of the chemicals on the process restrictor 250A, thereby helping to keep the flow rate from changing. Also, auxiliary manifold keeps the chemicals separate from the lower manifold 34A, thereby helping keep traces of the regeneration chemicals entering from the process fluid. This type of feature can be greatly beneficial to certain unit operations, such as production of ultrapure water, wherein any trace of undesired chemicals can be highly detrimental to the treated water quality.

In order to prevent flow reversal, one or more check valves may be provided. For example, the nozzle 240 of FIG. 8 may include an integral check valve 80 positioned in the auxiliary duct 342B. This is particularly useful to keep regeneration chemical from returning. Such a feature saves time and costs by

eliminating a need to flush the entire auxiliary duct 342B before switching back to the service mode and also reducing the amount of chemicals needed for regeneration. A check valve 80 may also be provided in the duct 342A if flow is desired in only one direction. The check valves 80 can function as a safety  
5 feature, preventing the backflow of regeneration chemicals during a normal fluid processing mode. It should be understood that a check valve could be provided in any fluid passage of the systems described herein.

In a further embodiment, one or more of the nozzles have multiple  
10 auxiliary restrictors (not shown). Additionally, multiple auxiliary manifolds may be provided in communication with these multiple restrictors. Such a system keeps various fluids isolated in dedicated plumbing for each fluid. This prevents undesired contamination or mixing of fluids and also reduces wear on the various orifices.

15  
FIG. 11 illustrates another embodiment of the nozzle 440. The nozzle 440 is similar to the nozzle 40 of FIGS. 3 and 4, but the nozzle 440 includes a restrictor 450 having a cylindrical wall 452 that extends downwardly against the bottom plate 460. The nozzle 440 uses few parts, yet provides directionally controlled  
20 orifice flow. Additionally, in the illustrated embodiment, the nozzle 440 includes orifices 353 which are oriented generally perpendicularly to a central axis of the nozzle 440.

Although the present invention has been described with reference to  
25 preferred embodiments, it will be understood that the invention is not limited to the specific features of the described embodiments. Various substitutions and modifications to the present invention will be apparent to those skilled in the art. Such substitutions and modifications may be made without departing from the



Variable	Mean	SD	Min	Max
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.8	0.2	0	1
Smoking status	0.3	0.5	0	1
Alcohol consumption	0.2	0.4	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	0.7	0.3	0	1
Sleep quality	0.6	0.4	0	1
Work satisfaction	0.5	0.5	0	1
Life satisfaction	0.6	0.4	0	1
Depression score	0.3	0.5	0	1
Anxiety score	0.2	0.4	0	1
Quality of life	0.7	0.3	0	1
Healthcare utilization	0.4	0.5	0	1
Health insurance status	0.9	0.1	0	1
Chronic disease status	0.1	0.3	0	1
Medication usage	0.2	0.4	0	1
Healthcare provider rating	0.8	0.2	0	1
Healthcare access	0.7	0.3	0	1
Healthcare cost	0.5	0.5	0	1
Healthcare quality	0.6	0.4	0	1
Healthcare satisfaction	0.5	0.5	0	1
Healthcare utilization frequency	0.4	0.5	0	1
Healthcare utilization cost	0.3	0.4	0	1
Healthcare utilization quality	0.6	0.4	0	1
Healthcare utilization satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost	0.4	0.5	0	1
Healthcare utilization frequency quality	0.6	0.4	0	1
Healthcare utilization frequency satisfaction	0.5	0.5	0	1
Healthcare utilization cost quality	0.4	0.5	0	1
Healthcare utilization cost satisfaction	0.5	0.5	0	1
Healthcare utilization quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality	0.4	0.5	0	1
Healthcare utilization frequency cost satisfaction	0.5	0.5	0	1
Healthcare utilization frequency quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.4	0	1
Healthcare utilization frequency cost quality satisfaction	0.5	0.5	0	1
Healthcare				

## WHAT IS CLAIMED IS:

1. A nozzle for use in fluid treatment system having a processing medium, the nozzle being immersed in the medium to withdraw a flow of fluid from the medium, the nozzle comprising:
  - an outer screen including a plurality of screen openings collectively having a screen open area, the outer screen defining an interior cavity;
  - a duct in fluid communication with the cavity; and
  - a flow restrictor for limiting the flow rate between the cavity and the duct, the flow restrictor including a tube extending from the duct into the interior cavity, and at least one orifice disposed in the tube providing fluid communication between the cavity and the duct, the total orifice area being less than the total screen open area.
2. The nozzle according to claim 1, wherein the orifice is disposed at an angle non-perpendicular to a central axis of the tube.
3. The nozzle according to claim 2, wherein the orientation of the orifice is such that a flow of fluid from the orifice into the cavity is directed toward a bottom portion of the screen.
4. The nozzle according to claim 1, wherein the orifice is disposed generally perpendicularly to a central axis of the tube.
5. The nozzle according to claim 1, including multiple orifices disposed at different radial orientations around the tube.

6. The nozzle according to claim 1, wherein the screen is generally cylindrical, the nozzle further comprising an end cap mounted to a bottom of the screen.

5 7. The nozzle according to claim 1, wherein the screen is generally cylindrical, the nozzle further comprising an end cap mounted to a bottom of the screen, wherein the restrictor further comprises an end wall mounted to an end of the tube, the end wall being spaced from the end cap.

10 8. The nozzle according to claim 1, wherein the screen is generally cylindrical, the nozzle further comprising an end cap mounted to a bottom of the screen, and wherein the generally cylindrical wall extends to the end cap.

15 9. The nozzle according to claim 1, further comprising an auxiliary fluid duct for providing flow of an auxiliary fluid, the auxiliary duct in communication with the interior cavity and an auxiliary restrictor for limiting the flow rate between the cavity and the auxiliary fluid duct, the restrictor including at least one orifice providing fluid communication between the cavity and the duct, the at least one auxiliary orifice having a collective open area less than the screen  
20 open area.

10. The nozzle according to claim 9, wherein the auxiliary restrictor includes a tube positioned within the interior cavity, the at least one orifice being disposed in the wall.

25 11. The nozzle according to claim 10, wherein the auxiliary restrictor further includes a check valve mounted upstream of the tube to permit one-way flow away from the auxiliary orifice.

12. A fluid treatment system comprising:

a vessel, wherein a granular processing medium occupies at least a lower portion of the vessel;

an upper manifold for introducing fluid into the vessel above the processing  
5 medium; and

a lower manifold for withdrawing fluid from the medium, the manifold including a fluid exit duct, and a plurality of nozzles immersed in the medium, each of the nozzles being in communication with the fluid exit duct, each of the nozzles having an external screen having a plurality of screen openings having a  
10 collective exterior open area and the screen defining an internal cavity, and a flow restrictor providing fluid communication between the interior cavity and the duct, the flow restrictor having a generally cylindrical wall positioned within the interior cavity, at least one orifice being disposed in the wall, the at least one orifice collectively having a total orifice area, wherein the total orifice area is less than the  
15 exterior open area.

13. The invention according to claim 12, wherein each of the nozzles further includes an auxiliary duct, an auxiliary restrictor having at least one auxiliary orifice providing communication between the auxiliary duct and the  
20 interior cavity, and wherein the vessel further comprises an auxiliary manifold in communication with the auxiliary duct.

14. The invention according to claim 12, wherein the orifice is disposed at an angle non-perpendicular to an axis of the cylindrical wall.

25

15. The invention according to claim 12, including multiple orifices disposed at different radial orientations around the wall.

16. The invention according to claim 12, wherein the orifice is disposed generally perpendicularly to a central axis of the cylindrical wall.

17. A process for treating a fluid, the process comprising the steps of:  
5 a providing a vessel having an inner chamber, the chamber containing a processing medium through which fluid can pass;  
introducing the process fluid into the chamber above the medium;  
providing a manifold including a plurality of nozzles in communication  
with an outlet, each of the nozzles including an outer screen defining an interior  
10 cavity, the screen having a plurality of screen openings having a collective screen opening area, a duct, and a restrictor having at least one orifice providing fluid communication between the duct and the interior cavity, the at least one orifice positioned generally within the interior cavity and having a collective orifice area less than the screen opening area; and  
15 withdrawing fluid from the medium into the nozzle through the screen openings so that the fluid flows across the interior cavity, through the orifice and into the duct.

18. The process according to claim 17 further comprising:  
20 ceasing the introducing of process fluid;  
introducing a reconditioning fluid into the medium; and  
withdrawing the reconditioning fluid into the nozzle through the screen openings so that the fluid flows across the interior cavity, through the at least one orifice and into the duct.

19. The process according to claim 17, further comprising:  
25 providing the nozzle with an auxiliary duct and an auxiliary restrictor having at least one auxiliary orifice with a total orifice area less than the screen

opening area, the orifice providing fluid communication between the auxiliary duct and the interior cavity;

ceasing the introducing of process fluid;

introducing a reconditioning fluid into the medium; and

5 withdrawing the reconditioning fluid into the nozzle through the screen openings so that the fluid flows across the interior cavity, through the at least one auxiliary orifice and into the auxiliary duct.

20. The process according to claim 17 wherein the medium is an ion  
10 exchange resin, the process further comprising demineralizing the process fluid as it flows through the medium.

21. The process according to claim 17, wherein the medium is a slurry,  
wherein the withdrawing step further results in removing moisture from the slurry.  
15

22. The process according to claim 21, further comprising the step of forcing liquid outwardly through the screen openings to clean the openings.

23. A nozzle for use in a system for withdrawing fluid from a medium,  
20 wherein the system includes more than one of the nozzles connected to a common manifold, each of the nozzles comprising: an outer screen defining an interior cavity, the screen including a plurality of screen openings, the screen defining an interior cavity; a duct providing fluid communication between the manifold and the interior cavity; and a flow restrictor extending from the duct into the interior cavity, the flow  
25 restrictor including at least one orifice positioned within the interior cavity providing fluid communication between the cavity and the duct, the total orifice area being less than the total screen open area.

Abstract of the Disclosure

A nozzle and associated system for treating fluids is provided, particularly for a system including a reaction vessel containing a granular filter or ion exchange medium and a fluid manifold immersed in the granular or ion exchange medium. The nozzle has an outer screen defining an interior cavity, a duct for providing flow to the interior cavity, and a restrictor having at least one orifice through which the duct is in communication with the cavity. The orifice or orifices of the restrictor have a total open area that is less than the total open area of the outer screen. By this sizing relationship, the nozzle flow rate is dictated by the inner orifice area, not the outer screen open area. In comparison to the outer screen openings, each of the inner orifices is less susceptible to plugging or wearing than the narrow outer screen openings, which are adjacent to medium. The nozzle according to the invention therefore provides a consistent predetermined flow rate and pressure drop profile over extended periods.

Advantageously, a manifold including a spaced array of the nozzles has consistent flow rates among all of the nozzles, facilitating a desired flow profile through the medium to the manifold. Also disclosed are nozzle embodiments having multiple fluid ducts, each having a dedicated flow restrictor orifice.

FIG.1

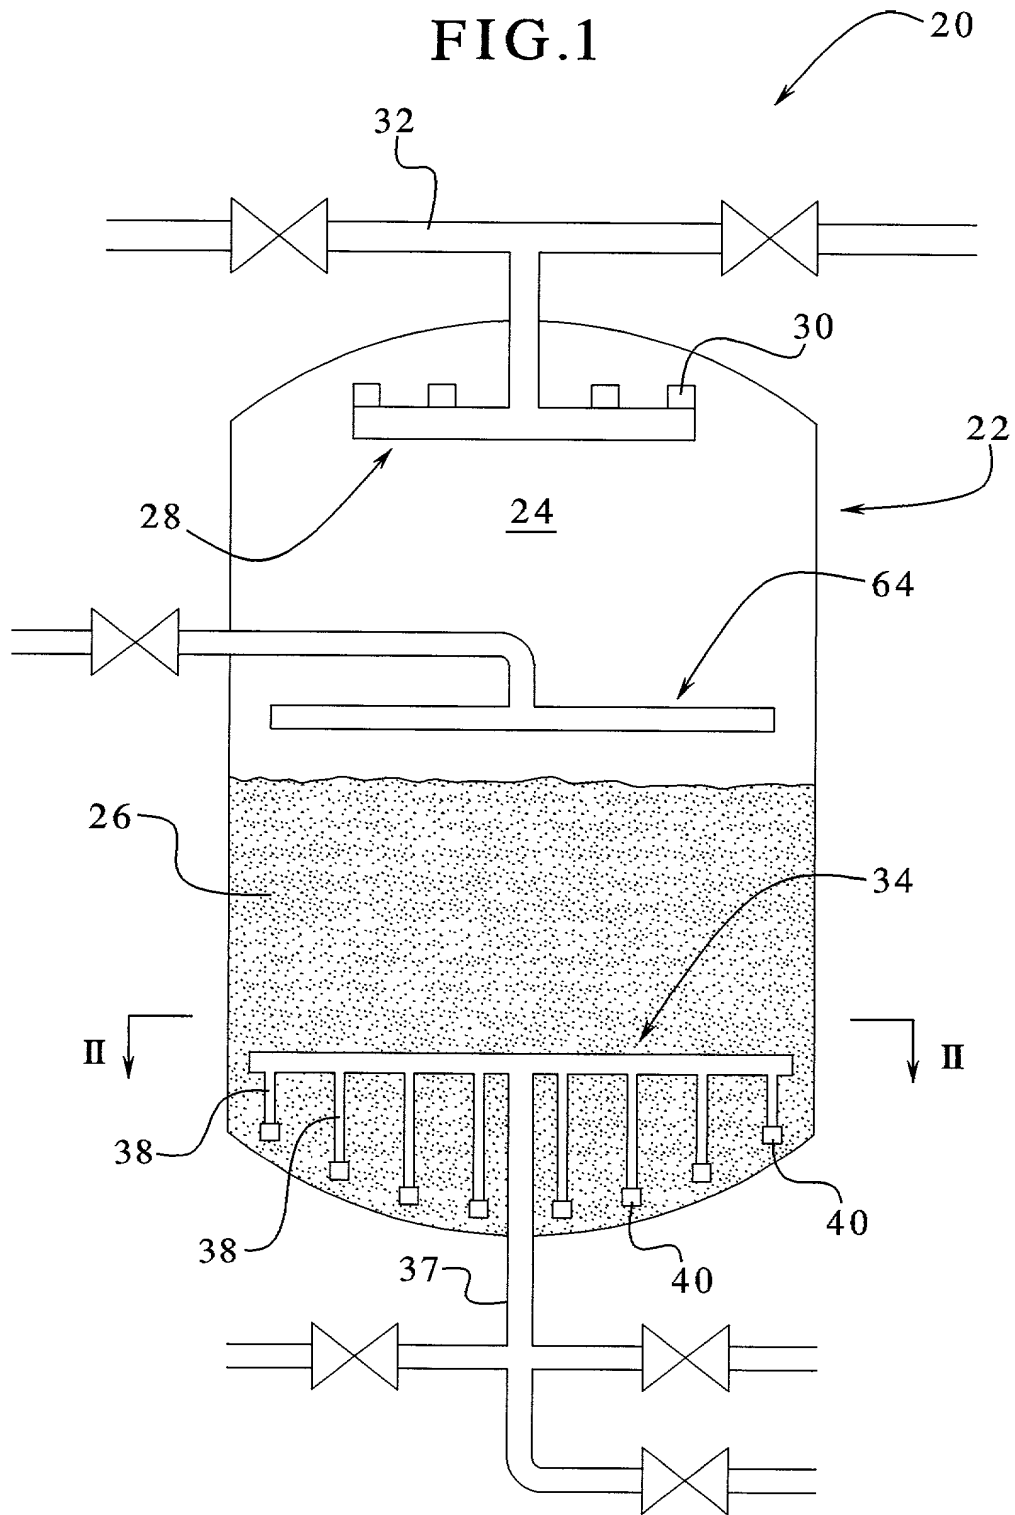




FIG.2

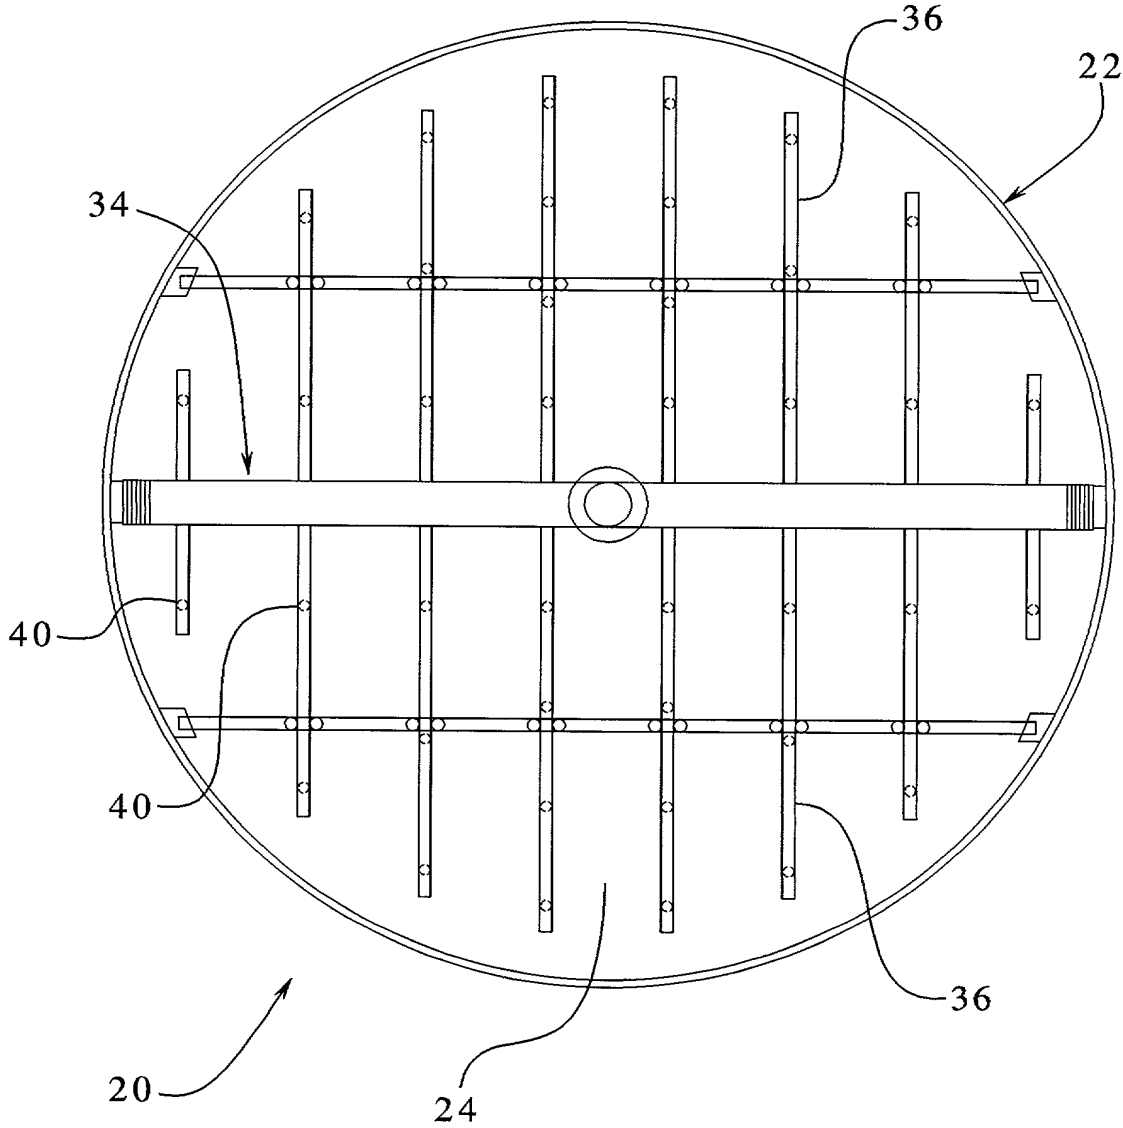


FIG.3

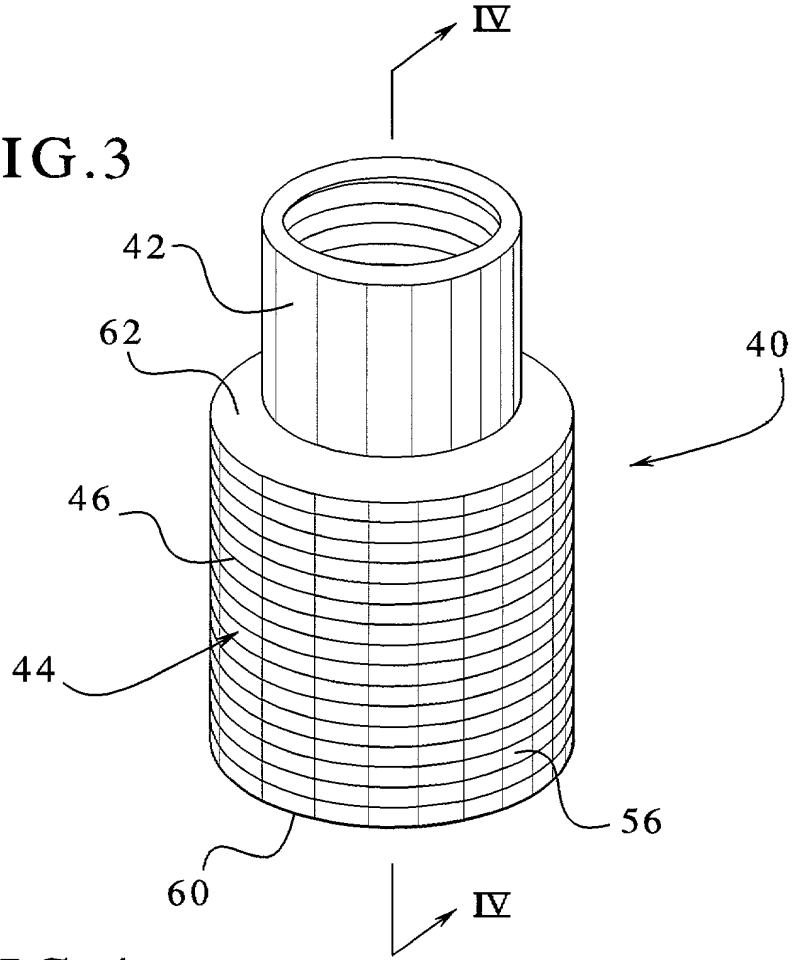
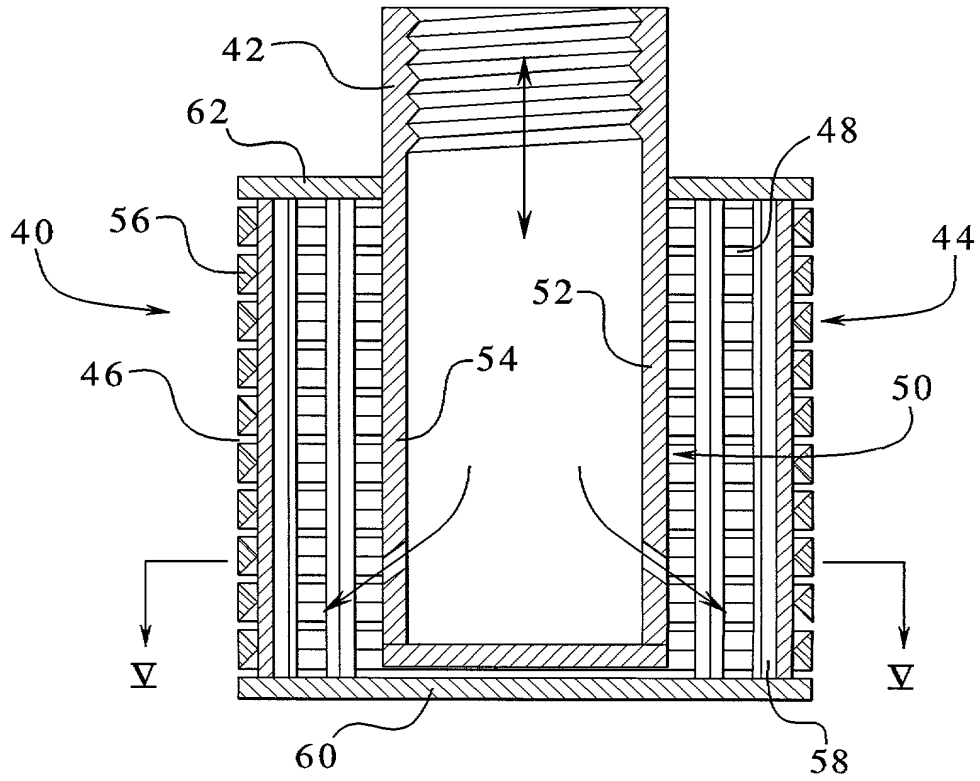


FIG.4



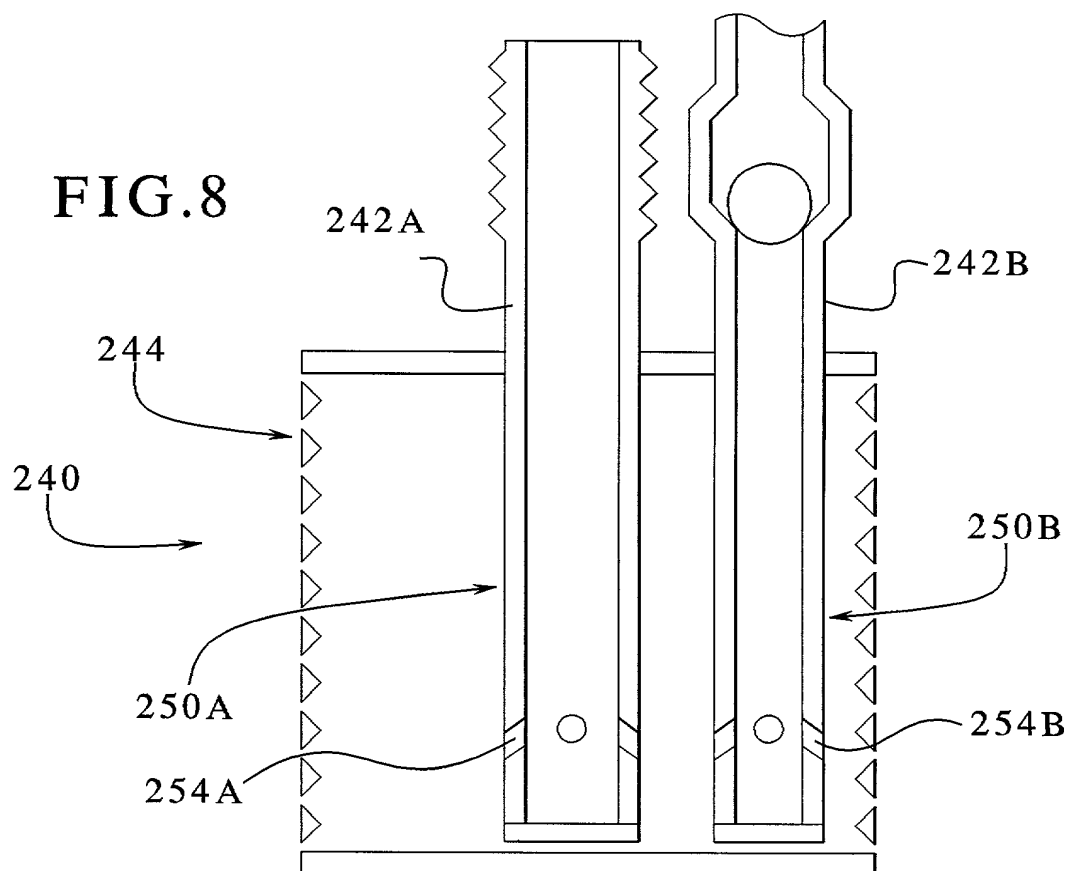
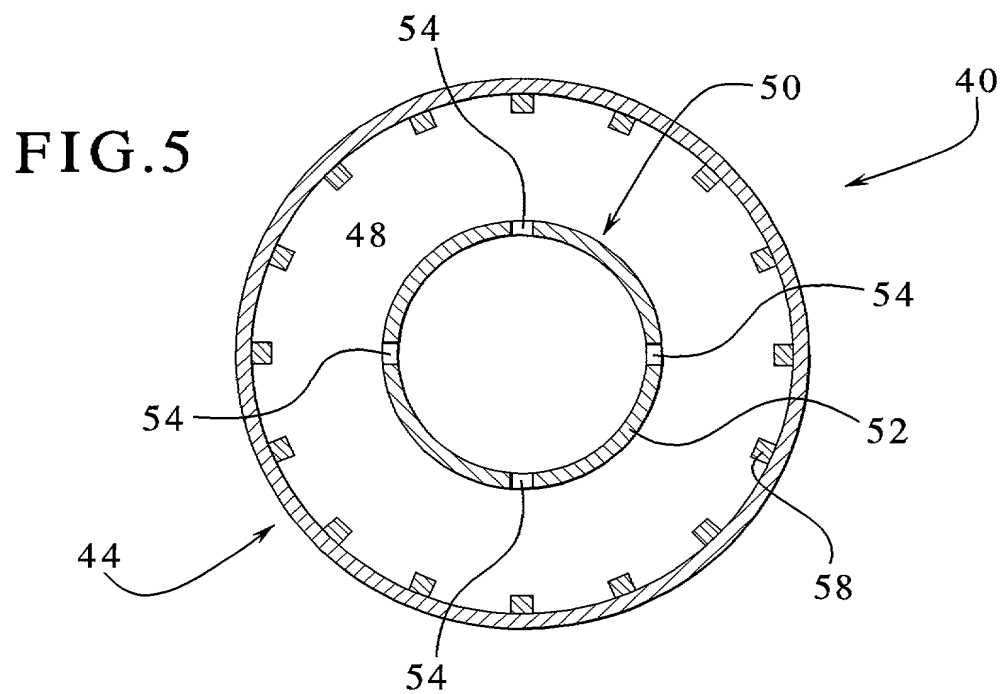


FIG. 6

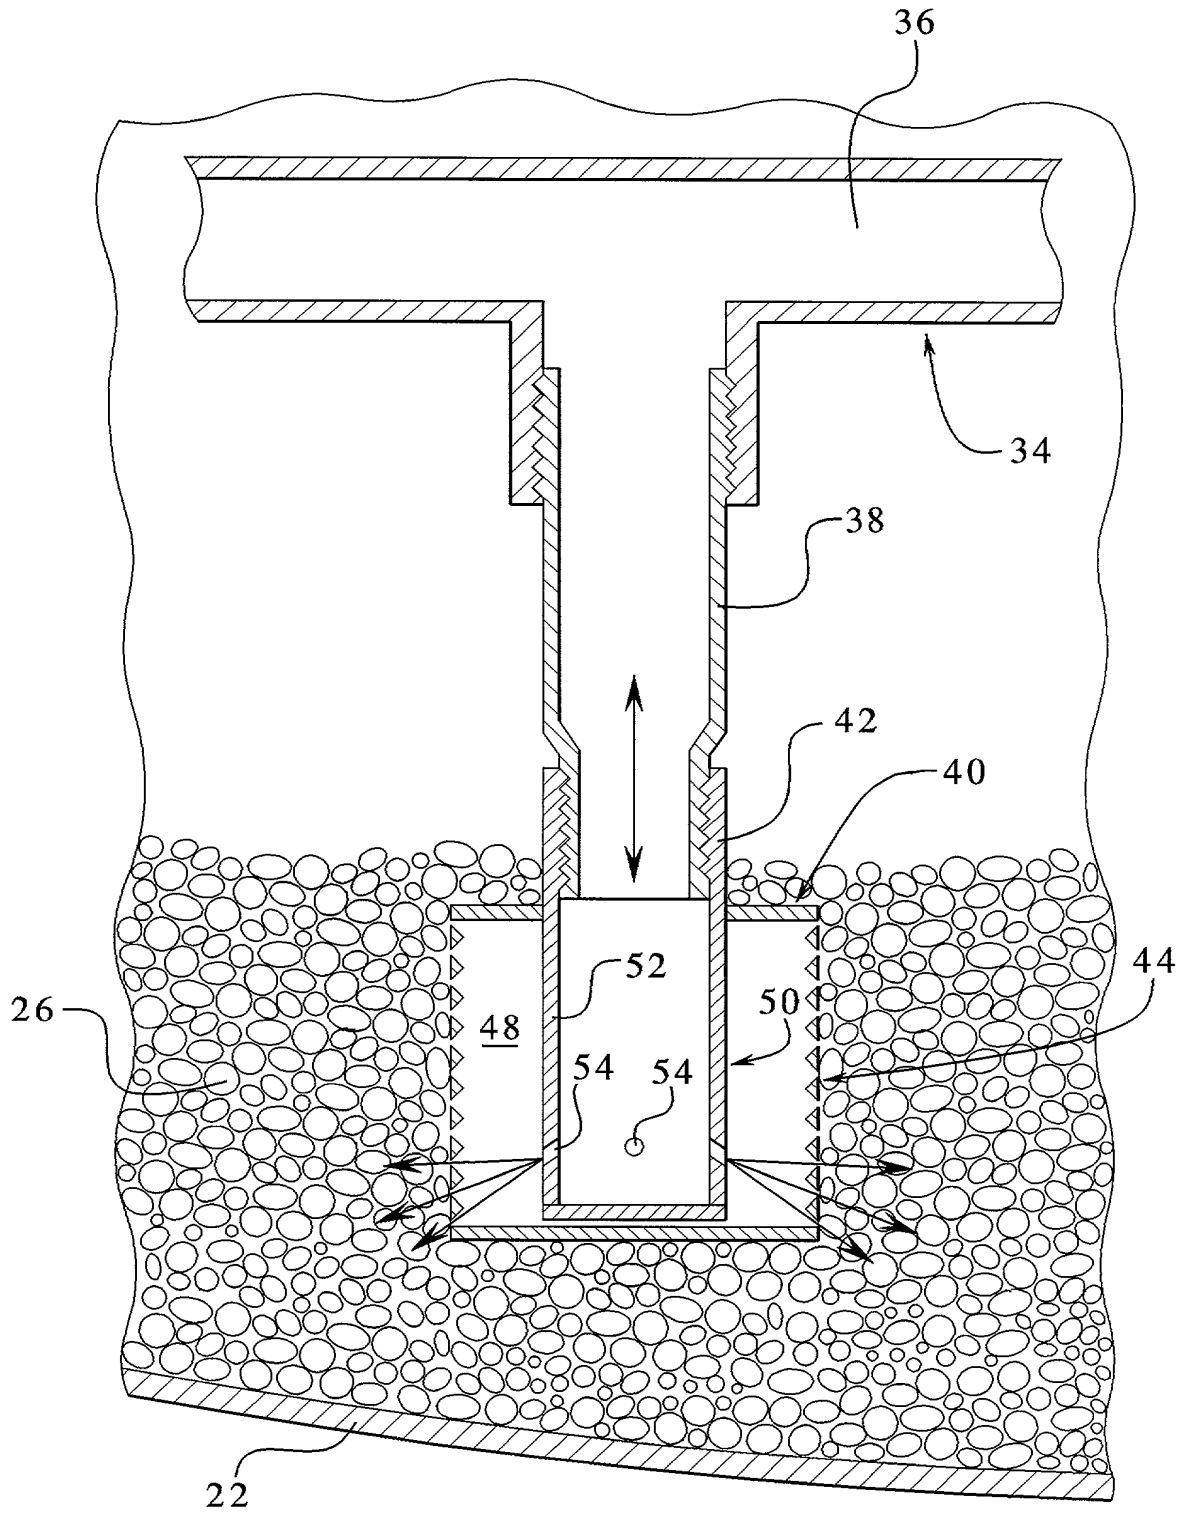


FIG. 7a

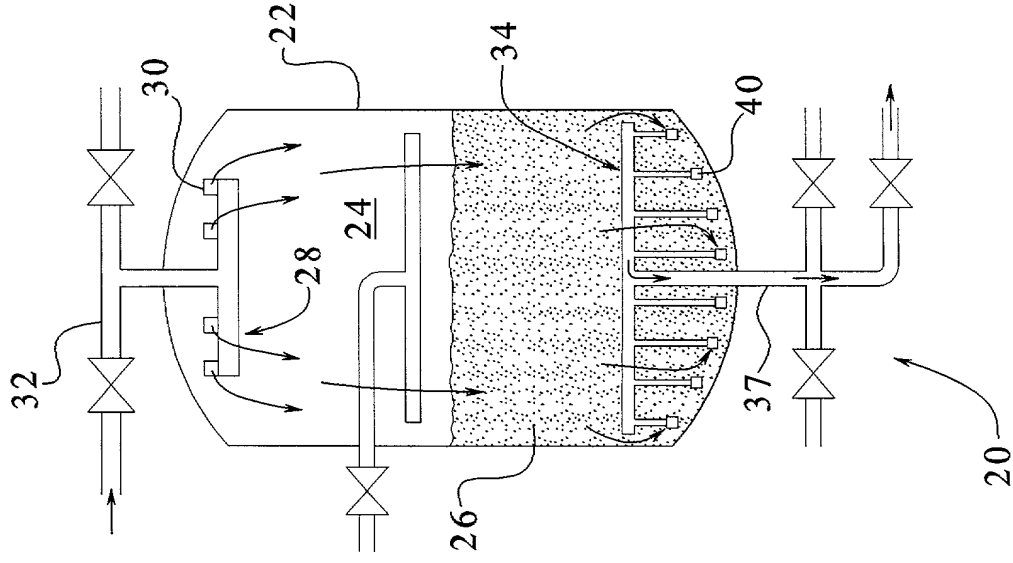


FIG. 7b

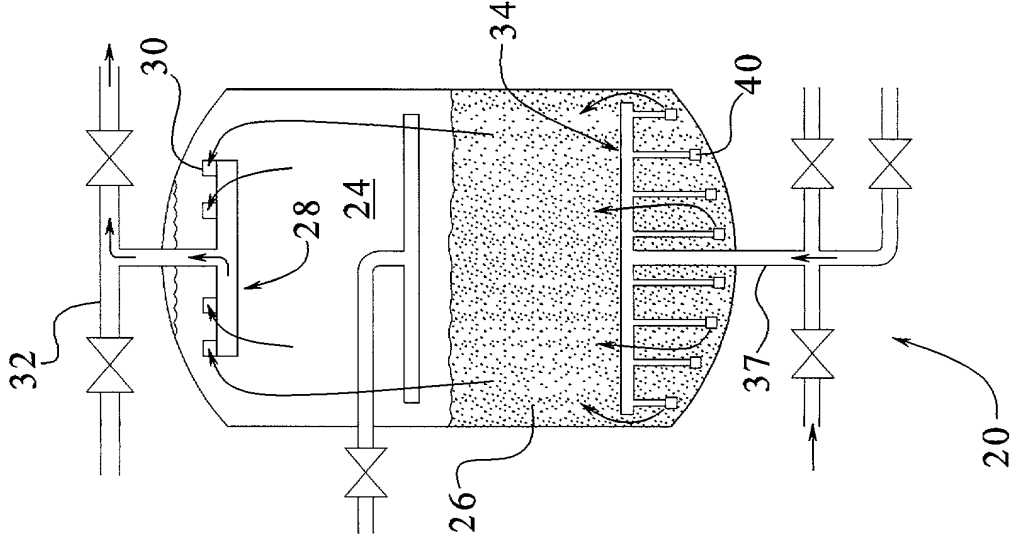


FIG. 7c



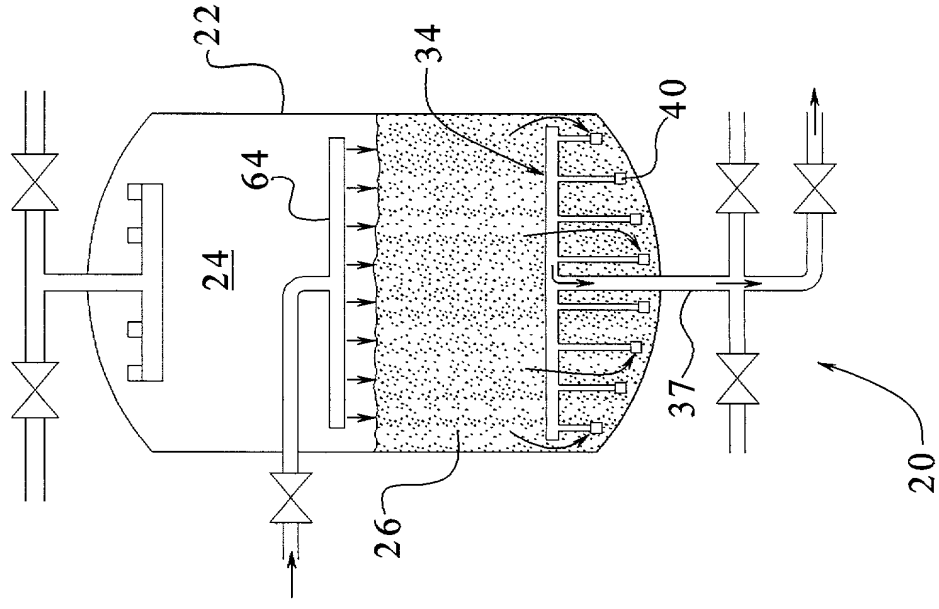



FIG. 9

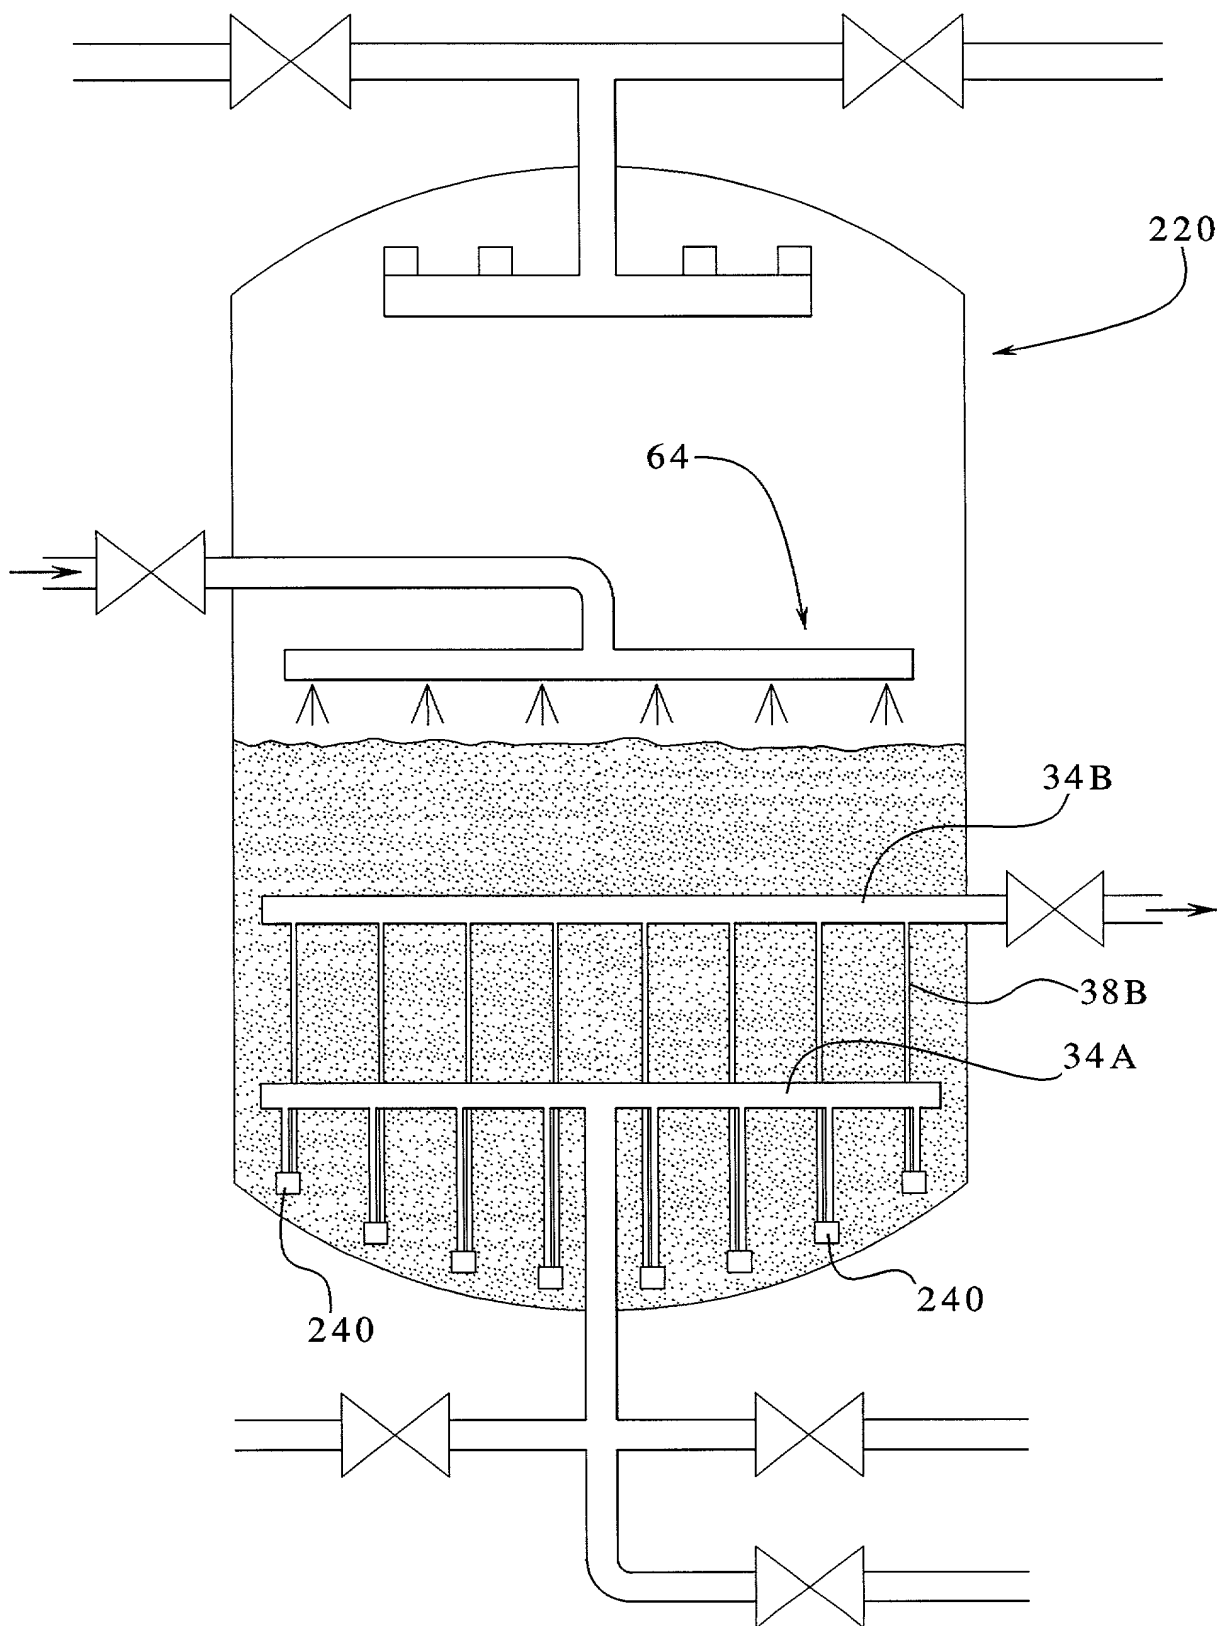


**FIG.10**  
(PRIOR ART)

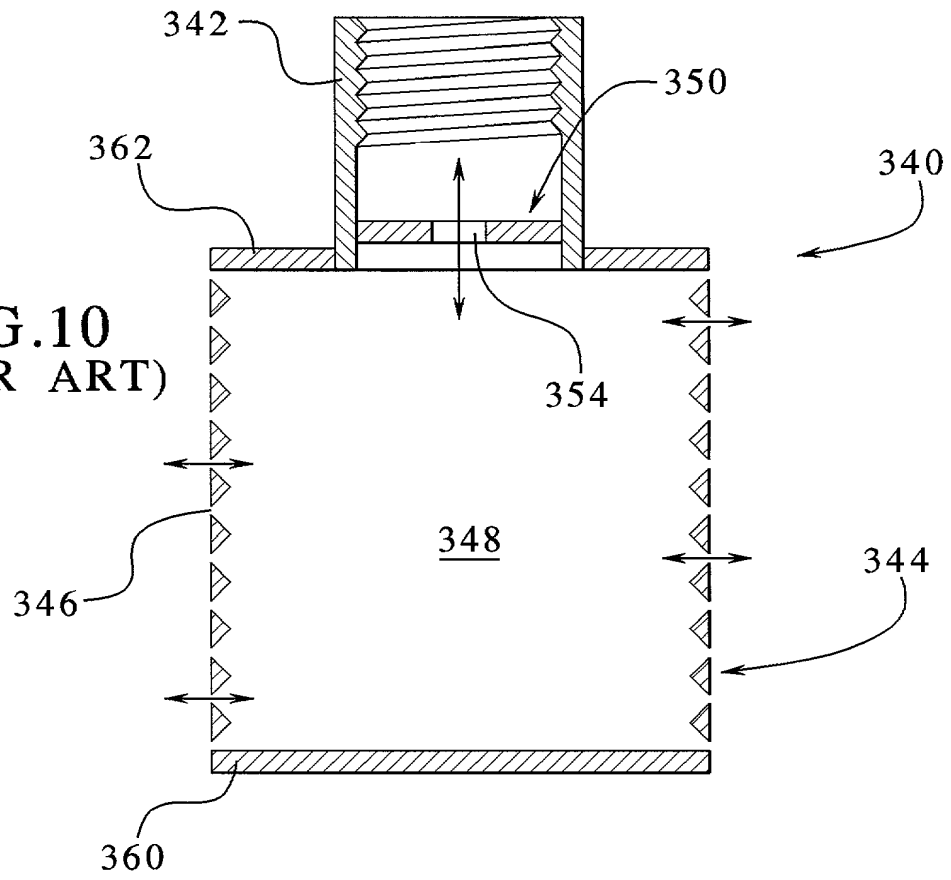


**FIG.11**

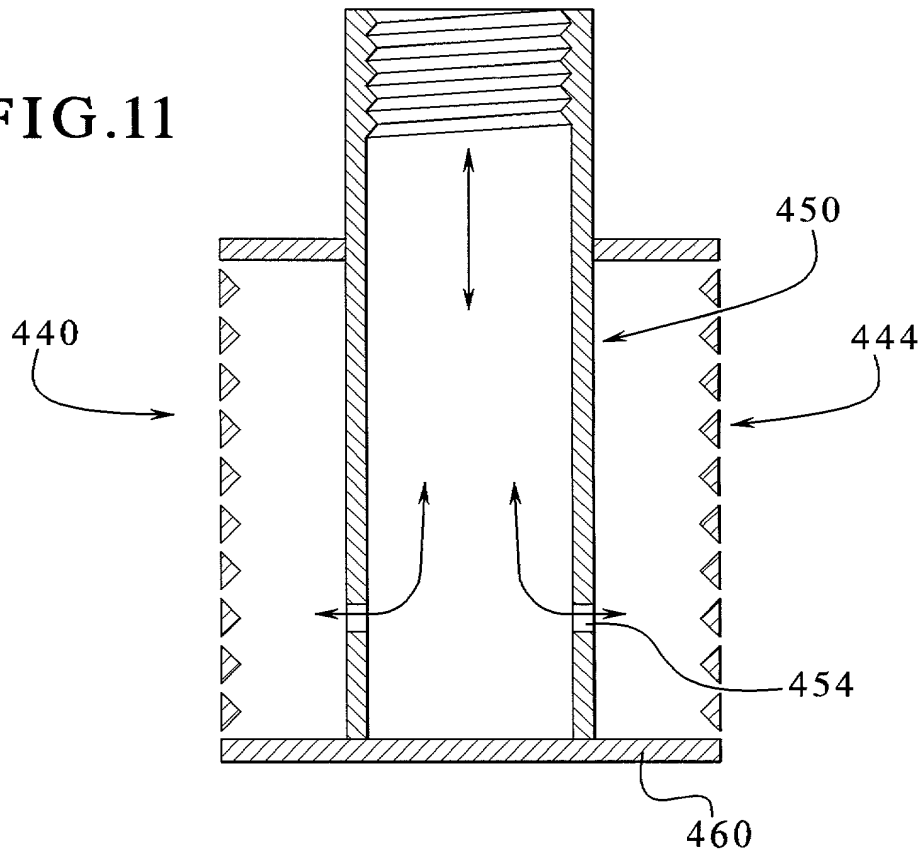

**FIG.12**  
(PRIOR ART)

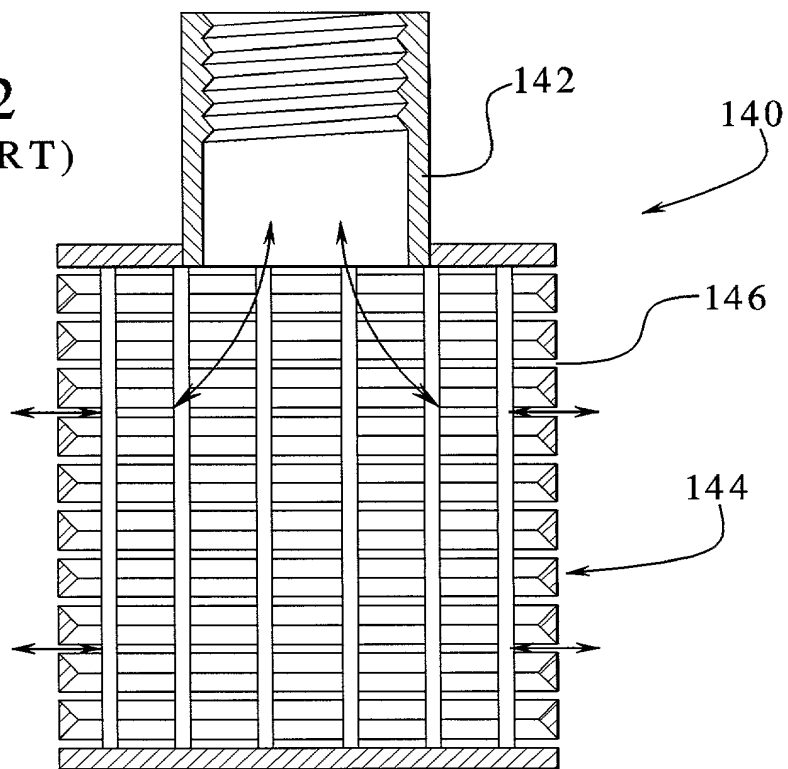

**FIG.13**  
(PRIOR ART)

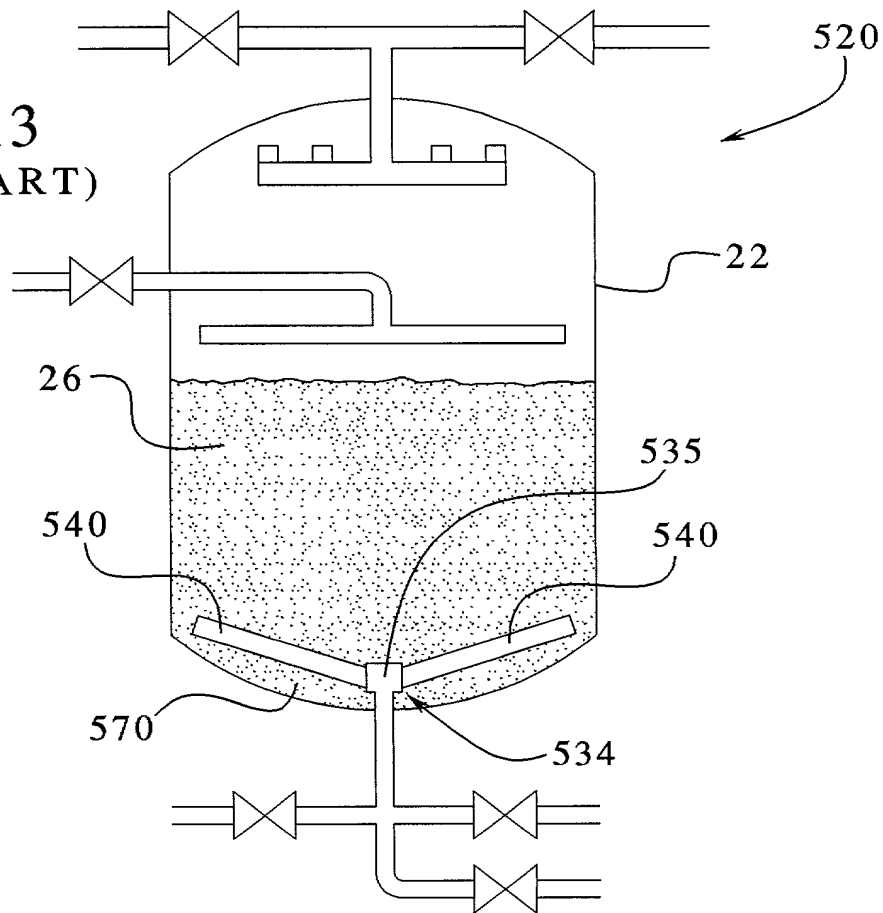



COMBINED DECLARATION AND POWER OF ATTORNEY

As below named inventor, I hereby declare that

This declaration is of the following type:

- ☒ original ☐ design ☐ supplemental  
☐ national stage of PCT  
☐ divisional ☐ continuation ☐ continuation-in-part

My residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (*if only one name is listed below*) or an original, first, and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FILTER SCREEN NOZZLE AND SYSTEM FOR FLUID  
PROCESSING

the specification of which:

- ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (*if applicable*).  
☐ was filed by Express Mail No. \_\_\_\_\_ as Application No. not known yet, and was amended on \_\_\_\_\_ (*if applicable*).  
☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended pursuant to PCT Article 19 on \_\_\_\_\_ (*if any*).

I state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to the patentability of this application in accordance with 37 C.F.R. § 1.56.

I claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent, utility model, design registration, or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN PATENT, UTILITY MODEL, AND DESIGN REGISTRATION APPLICATIONS						
COUNTRY	APPLICATION	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. § 119			
				YES		NO
				YES		NO
				YES		NO

I claim the benefit pursuant to 35 U.S.C. § 119(e) of the following United States provisional application(s):

PRIOR U.S. PROVISIONAL APPLICATIONS BENEFIT CLAIMED UNDER 35 U.S.C. 119(e)	
APPLICATION NO.	DATE OF FILING (day,month,year)

I claim the benefit pursuant to 35 U.S.C. § 120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. § 1.56 effective between the filing date of the prior application(s) and the national or PCT international filing date of this application.

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL PATENT APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120					
U.S. APPLICATIONS			Status (check one)		
APPLICATION NO.	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
1. 0 /					
2. 0 /					
3. 0 /					
PCT APPLICATIONS DESIGNATING THE U.S.			Status (check one)		
PCT APPLICATION NO.	PCT FILING DATE (day,month,year)	U.S. APPLN. NOS. ASSIGNED (if any)	PATENTED	PENDING	ABANDONED
4.					
5.					
6.					

DETAILS OF FOREIGN APPLICATIONS FROM WHICH PRIORITY CLAIMED UNDER 35 U.S.C. § 119 FOR ABOVE LISTED U.S./PCT APPLICATIONS				
ABOVE APPLN. NO.	COUNTRY	APPLICATION NO.	DATE OF FILING (day,month,year)	DATE OF ISSUE (day,month,year)
1.				
2.				
3.				
4.				
5.				
6.				

As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

In re Appln. of Pandya  
Attorney Docket No. 206248

James B. Muskal, Reg. 22797  
Dennis R. Schlemmer, Reg. 24703  
Gordon R. Coons, Reg. 20821  
John E. Rosenquist, Reg. 26356  
John W. Kozak, Reg. 25117  
Charles S. Oslakovic, Reg. 27583  
Mark E. Phelps, Reg. 28461  
H. Michael Hartmann, Reg. 28423  
Bruce M. Gagala, Reg. 28844  
Charles H. Mottier, Reg. 30874  
John Kilyk, Jr., Reg. 30763  
Robert F. Green, Reg. 27555  
John B. Conklin, Reg. 30369  
James D. Zalewa, Reg. 27848  
John M. Belz, Reg. 30359  
Brett A. Hesterberg, Reg. 31837  
Jeffrey A. Wyand, Reg. 29458  
Paul J. Korniczky, Reg. 32849  
Pamela J. Ruschau, Reg. 34242  
Steven P. Petersen, Reg. 32927

John M. Augustyn, Reg. 33589  
Christopher T. Griffith, Reg. 33392  
Wesley O. Mueller, Reg. 33976  
Jeremy M. Jay, Reg. 33587  
Jeffrey B. Burgan, Reg. 35463  
Eley O. Thompson, Reg. 36035  
Mark Joy, Reg. 35562  
Allen E. Hoover, Reg. 37354  
David M. Airan, Reg. 38811  
Xavier Pillai, Reg. 39799  
Y. Kurt Chang, Reg. 41397  
Gregory C. Bays, Reg. 40505  
Carol Larcher, Reg. 35243  
Steven H. Sklar, Reg. 42154  
M. Daniel Hefner, Reg. 41826  
Thomas A. Belush, Reg. 37090  
Kenneth P. Spina, Reg. 43927  
Siegmun Y. Gutman, Reg. 46304  
Andrea M. Augustine, Reg. 46526

Andrew J. Heinisch, Reg. 43666  
Jeffery J. Makeever, Reg. 37390  
Salim A. Hasan, Reg. 38175  
Richard A. Wulff, Reg. 42238  
Phillip M. Pippenger, Reg. 46055  
Jamison E. Lynch, Reg. 41168  
Vladan M. Vasiljevic, Reg. 45177  
Kathryn M. Lumb, Reg. 46885  
Rattan Nath, Reg. 43827  
Robert M. Gould, Reg. 43642  
Len Smith, Reg. 43139  
Kevin L. Wingate, Reg. 38662  
Michael N. Spink, Reg. 47107  
David J. Schodin, Reg. 41294  
Heather R. Kissling, Reg. 45790  
Paul L. Ahern, Reg. 17020  
Theodore W. Anderson, Reg. 17035  
Berton Scott Sheppard, Reg. 20922  
Noel I. Smith, Reg. 18698

I further direct that correspondence concerning this application be directed to LEYDIG, VOIT & MAYER, LTD., Two Prudential Plaza, Suite 4900, 180 North Stetson, Chicago, Illinois 60601-6780, Telephone (312) 616-5600.

I declare that all statements made herein of my own knowledge are true, that all statements made on information and belief are believed to be true, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Ken V. Pandya

Inventor's signature

Date November 3, 2000

Country of Citizenship: U.S.A.

Residence: Plano, Texas  
(city/state or country)

Post Office Address: 1817 Triple Crown Lane, Plano, Texas 75093, U.S.A.  
(complete mailing address)